

CONTENT

DISINFECTION SYSTEMS

Chlorine gas systems

- P. 408 Chlorine gas systems
- P. 412 dsc Touch GAS

Electrolysis systems

- P. 416 Overview
- P. 418 VoDes BlueWave
- P. 420 Inline ACCESS
- P. 421 Inline SOLO / DUO 2020
- P. 421 Inline SOLO / DUO 2021
- P. 422 Inline TRIO PREMIUM
- P. 424 Membrane cell technology as an advantage
- P. 425 Electrolysis salt
- P. 426 MZE SMART
- P. 425 Tubular cell technology
- P. 430 Membrano EC

Ozone / UV

- P. 434 optoZON system technology
- P. 434 din-o-zon system technology
- P. 435 dinUV

Hand and surface disinfection

- P. 438 VoDes BlueWave SDP
- P. 439 dinoCLEAN TURBO ADDITIVE
- P. 439 Jumbo Laser G30A
- P. 440 Multi4U
- P. 440 80% ethanol disinfectant
- P. 441 dinofect PRO

SAFETY FIRST

- Proven technology
- Factory expert service
- Cross-brand chlorine gas regulator maintenance according to GUV-V D5
- Complete range for all requirements

CHLORINE GAS SYSTEMS

CHLORINE GAS SYSTEMS



This technology has been used for decades for disinfection of pool water, mainly in large public swimming pools. dinotec Servodos systems, designed according to the vacuum process to DIN 19606, meet the highest safety standards. The modular program ranges from plain manual systems up to fully automated systems.

PRODUCT INFORMATION

dinotec CHLORINE GAS SYSTEMS - A CONVINCING **TECHNOLOGY**

- Maximum safety with vacuum control
- Use of chlorine without carrier materials (i.e. 100% chlorine)
- Easy operation
- Optimized construction costs due to modular design
- Precise dosing technology
- · Low installation costs
- Easy-to-service assembly groups
- Manual or fully automatic systems
- Fulfills DIN requirements
- Consulting, planning, project development by dinotec
- Maintenance according to GUV (accident prevention regulation) by dinotec

	DESCRIPTION	ART. NO.	
	VACUUM REGULATOR DCG 4004		
	Vacuum regulator with pressure gauge for installation into cylinder or collecting pipe in partial vacuum or all vacuum systems. Areas of use start from a manual dosing of chlorine gas up to an automatic control with actuator. Capacity max. 4000 g chlorine/h		
Man a	Without flow-rate limitation	a 0310-014-00	В
-6	With flow-rate limitation	1 0310-014-90	A
-500	VACUUM SAFETY VALVE 543	a 0330-192-00	В
	To prevent a build-up of pressure in the vacuum line to the injector Connections PE hose 8x11 for chlorine gas system		
24 (40)	VACUUM REGULATOR DCG 10	310-003-00	В
O Car	Vacuum regulator for installation into cylinder or collecting pipe in partial vacuum or all vacuum systems. Areas of use start from a manual dosing of chlorine gas up to an automatic control with actuator. Capacity max. 10000 g chlorine/h With pressure gauge (impervious to fluids)		
	DCG-U CHANGEOVER SWITCH		
	Automatic changeover switch for 2 cylinder banks in all vacuum or partial vacuum systems. The changeover switches work without any auxiliary power.		
	DCG - U4 / up to 4000g chlorine/h for hose 8/11	2 0330-070-00	В
•	DCG - U10 / 4000-10000g chlorine/h for hose 10/14	0330-080-00	В
- 1	COLLECTING PIPE (PVC)		
	For all-vacuum systems		
	Basic kit for 2 cylinders	1 0310-038-00	A
	Extension kit for 1 bottle each	1 0310-045-00	A
10	WALL HOLDER FOR VACUUM CONTROLLER	1 0310-215-00	В
	Including screws and dowels		
	ABSORPTION CYLINDER FOR CHLORINE GAS SYSTEMS	0310-040-00	A
Tr.	Filled with 4.7l activated carbon		
	Securing clamp hot-dip galvanized For 1 chlorine gas cylinder each	→ 0340-025-00	А
II.	Support and assembly aid (Müpro rail) For securing clamps of chlorine gas cylinders	0300-010-00	A

DESCRIPTION



$\label{thm:manual} \mbox{ Manual chlorine gas dosing valves for installation between injector and vacuum controller.}$ An integrated secondary pressure control ensures a constant vacuum and a constant volume flow. Wall mounting plate (0320-000-00) required.

Dosing range Cl₂/h	Man. adjustment Cl2/h	ART. NO.
2 - 40 g	2 - 40 g	✓ 0320-001-05 C
5 - 100 g	5 - 100 g	✓ 0320-002-05 C
10 - 250 g	10 - 250 g	0320-003-05 C
25 - 500 g	25 - 500 g	0320-004-05 C
50 - 1000 g	50 - 1000 g	0320-005-05 C
100 - 2000 g	100 - 2000 g	0320-006-05 C
150 - 3000 g	150 - 3000 g	0320-007-05 C
400 - 4000 g	400 - 4000 g	0320-008-05 €

ART. NO.

DOSING SYSTEM Servodos ERGO

DOSING SYSTEM Servodos DCG - H



Servodos chlorine gas dosing unit with electrical actuator (230V/50Hz) for connection to a 3-position controller, with feedback potentiometer. Connection for PE line 8/11 mm.

osing range Cl₂/h	ART. NO.	
2 - 40 g	2 0320-370-92	D
5 - 100 g	2 0320-371-92	D
10 - 250 g	→ 0320-372-92	D
25 - 500 g		D
50 - 1000 g	→ 0320-374-92	D
100 - 2000 g	→ 0320-375-92	D
150 - 3000 g	→ 0320-376-92	D
400 - 4000 g		D

DOSING SYSTEM Servodos



Servodos chlorine gas dosing system with electrical actuator (230V/50Hz) with a dosing range of up to 10.0 kg chlorine per hour.

Dosing range Cl ₂ /h	ART. NO.	
0.3 - 6 kg	20320-378-00 €	
0.4 - 8 kg	≈ 0320-379-00 C	
0.5 - 10 kg	≈ 0320-380-00 C	



For chlorine gas pipes and PVC motive water pipes

Model	Dosing range Cl2/h	Motive water pipe max.		ART. NO.	
DCG 06	up to 500 g	DN 20/d 25	8/11 PE pipe	2 0330-101-00	Α
DCG 06	up to 1000 g	DN 20/d 25	8/11 PE pipe	2 0330-102-00	Α
DCG 06	up to 2000 g	DN 20/d 25	8/11 PE pipe	2 0330-103-00	Α
DCG 06	up to 4000 g	DN 20/d 25	8/11 PE pipe	2 0330-104-00	Α
DCG 10	up to 10000 g	DN 25/d 32	-	0330-098-00	Α

SECOND CHECK VALVE FOR INJECTORS



Extension, installation directly on the injector or in the vacuum line (depending on version). Installation always upright (vertical).

Dosing range Cl ₂ /h	Assembly	ART. NO.	
DCG 06	Installation on injector	0330-097-00	A
DCG 06	Installation in vacuum line 8/11 mm	2 0330-099-00	A

PRESSURE BOOSTER SYSTEM (MOTIVE WATER) WITHOUT INJECTOR



With pressure controller, pump, strainer, spring-loaded check valve, sampling, injection valve

Dosing range Cl ₂ /h	Connection	ART. NO.
up to 2000 g	1"/d25	⊘ 0330-220-92 A
up to 4000 g	1 ¼"/d32	20330-222-91 A

CHLORINE GAS CONNECTING PARTS



CONNECTING PARTS

For flexible PE chlorine gas line 8/11 mm



Adhesive nipple in PVC d 12 mm	1330-060-00 A	
Adhesive nipple in PVC d 16 mm	1330-075-00 A	
Adhesive nipple in PVC d 20 mm	1330-080-00 A	
With external thread R ¼"	1330-065-00 A	
T-piece in PVC (vacuum)	1320-165-00 A	
Ball valve DN 10/d 16	1330-070-00 A	
Hose coupling	1320-120-00 A	
Ball valve PVC R 1/4	i 1320-050-00 A	

CONNECTING PARTS

For flexible PE chlorine gas line 10/14 mm



HOSE COUPLING 8/11 - 10/14 MM	✓ 1330-105-00 A	
Hose coupling	₫ 1330-106-00 A	
Ball valve DN 15/d 20	1320-075-00 A	
T-piece in PVC (vacuum)	₫ 1330-100-00 A	
With external thread R 1/2"	₫ 1330-085-00 A	
Adhesive nipple in PVC d 20 mm	1330-095-00 A	
Adhesive nipple in PVC d 16 mm	₫ 1330-090-00 A	



PE CHLORINE GAS LINE

Price per meter



CALCIUM CARBONATE REACTOR



В

0350-110-92



Pressure reactor in GRP 280I (operating pressure max. 2.5 bar), colour: yellow (RAL 1021), top sight-glass (filling port) in plexiglass with threaded connection R ¾" female thread for automatic vent valve.

Plexiglas sight-glass in the bottom part of the tank, differential pressure overflow valve 11/4", PVC connection fitting with male thread 1/4" and hose connection 8/6 mm, 5 m PE hose 8/6 mm.


approx. 174l Initial filling: 250 kg marble gravel



MARBLE GRAVEL (CALCIUM CARBONATE)

Granulation 4-6 mm Calcium carbonate Juraperle 25 kg Sack

10 0350-200-00 Price per kg В Price per bag

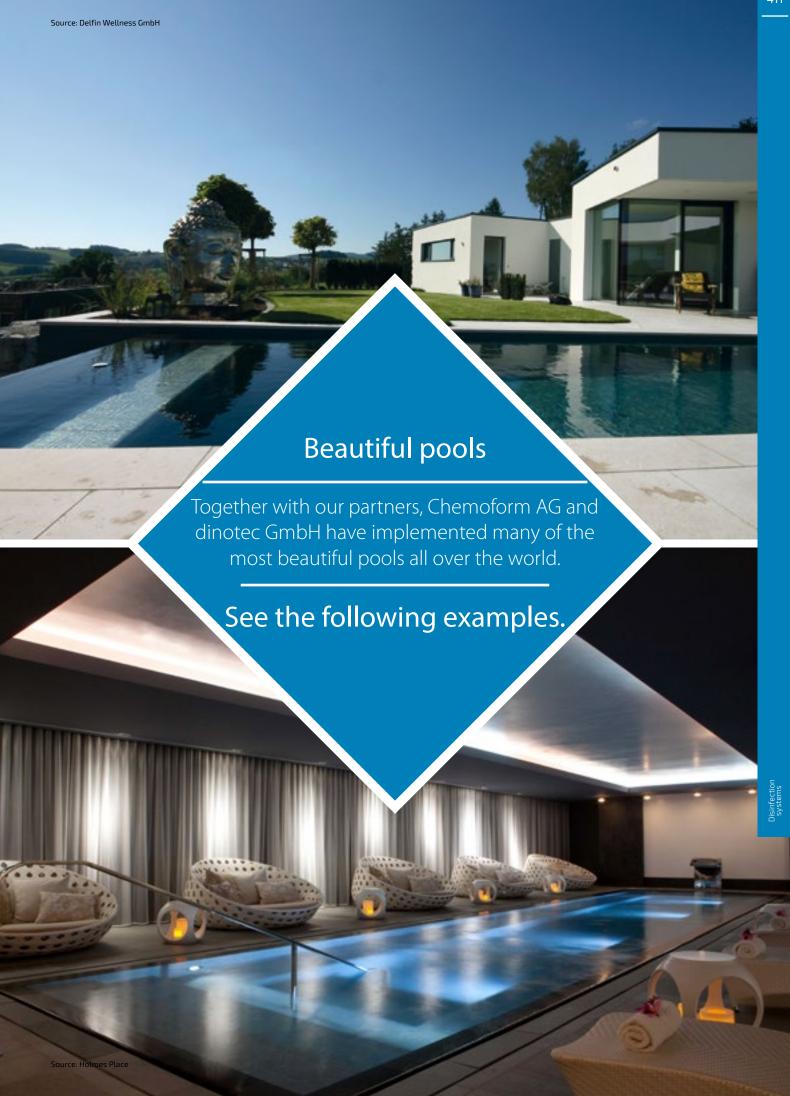

CHLORINE GAS SYSTEMS

dsc Touch GAS

Measuring and control device for gas concentration in the ambient air.





PRODUCT INFORMATION

Features:

- + Two measuring inputs, optionally Cl₂, ClO₂ or O₃
 + Two digital inputs, e.g. for door contact
 + Three relays, potential-free contact, incidents that activate the system can be selected, e.g. for sprinkler system
 + Analog output 0/2 20 mA., galvanically isolated, configurable. Working resistance max. 500 ohm. A 22 mA alarm function can be set
 + Touch screen with Eco mode
 + Integrated SD card function to store the device settings
 + Test menu for checking the wiring
 + Event memory for last 100 events
 + IP 65

- + Accessories for wall mounting



10 0410-014-00

	DESCRIPTION	ART. NO.	
	dsc Touch GAS	✓ 0410-300-00	A
Accessories ds	c Touch Gas		
	DESCRIPTION	ART. NO.	
	MODBUS RTU	0410-301-00	А
	RS 485 card		
	SECOND ANALOG OUTPUT 0/2 - 20MA	~ 0410-302-00	A

MODBUS RTU	→ 0410-301-00	A
RS 485 card		
SECOND ANALOG OUTPUT 0/2 - 20MA	~ 0410-302-00	A
Galvanically isolated		
 Can be configured. Working resistance max. 500 ohm 		
• A 22 mA alarm function can be set		
DATA LOGGER	~ 0410-303-00	A
SENSOR HOLDER FOR dsc Touch Gas	~ 0410-304-00	A
With M 12 connection excl. cable		
CONNECTION CABLE FOR SENSOR HOLDER	2 0410-305-00	A
• 5-wire cable, 5 x 0.25 mm ²		
Shielded		
 Length 10 m Connector type M12 (female, other end ferrules) 		
SENSOR POTENTIOSTATIC		
Suitable for dsc Touch GAS and dsc Eco Gas		
Chlorine 0 - 10 ppm	a 0410-052-00	A
Ozone 0 - 1 ppm	₫ 0410-016-00	A

Chlorine dioxide 0 - 10 ppm

ACCESSORIES FOR CHLORINE GAS AND SAFETY SYSTEMS

DESCRIPTION ART. NO.

SENSOR HOLDER FOR dsc ECO Gas

- With 10 m cable for dsc gas sensors • Not suitable for dsc Touch GAS
- CABLE EXTENSION FOR GAS SENSORS


4 0410-051-00

4 0410-306-00

• Extra charge for each additional meter

Maximum length is 50 m. (Please state the total length in your order!)







or 5 diministration power supply			
Sprinkler system for 1 nozzle, complete with all fittings, extended spindle	4 0430-010-00	Α	
Extension kit for sprinkler system for 1 nozzle each	~ 0430-011-00	Α	
Alarm horn (inside) 230V/IP55	a 0430-021-00	Α	
Alarm horn (outside) 230V/IP 65	0430-022-00	Α	
Warning light red (inside), 230V/IP55	1 0430-023-00	Α	
Set of warning signs for chlorine gas to GÜV 8.15	a 0300-600-90	Α	
Door switch (switch for deactivating the sprinkling)	~ 0420-060-00	Α	
Wall box for sprinkler systems with lock and break glass	4 0420-070-00	Α	
Respirator with screw filter (chlorine gas)	a 0300-401-00	Α	
Protective clothing complete for chlorine gas room	420-000-90	Α	
Spare screw filter chlorine gas, EC201, type B2	a 0420-003-00	Α	
Safety gloves, size 10	a 0420-010-00	Α	
Protective apron made of rubber	** 0420-011-00	Α	
Safety boots	0420-012-00	Α	
Protective goggles	a 0300-430-00	Α	
Finned heaters 230V/1000W/IP67, incl. thermostat	4 0430-012-00	Α	
Emergency kit for Cl ₂ cylinder 65 kg	2 0340-030-00	Α	
UPS - 230V AC, 20W/4h	~ 0450-010-90	Α	
Spare accumulator for UPS	4 0450-018-00	Α	
Control cabinet for UPS, AE compact, 300 x 300 x 210 mm	~ 0450-012-00	Α	
Ammonia test solution (50ml)	2 0310-070-00	Α	
Flow monitor for installation in inlet pipe of sprinkler system	430-015-00	Α	



DELIVERY INFORMATION

We supply all further chlorine gas components and accessories required for this range. We also offer project-related chlorine gas systems on request. If required, please contact either our sales representatives or our project specialists in Nidderau/Germany.